

A large decorative graphic on the left side of the page, featuring a vertical teal bar and several overlapping, curved teal and light blue shapes that sweep from the left towards the center.

Code of Practice

Upstream Polyethylene Gathering Networks – CSG Industry

Companion Paper CP-05-002

Ploughing

Revision I

May 2025

© The Australian Pipelines and Gas Association 2025

Important note on use of the *APGA Code of Practice for Upstream Polyethylene Gathering Networks in the Coal Seam Gas Industry* and its companion papers

This Code of Practice and the companion papers have been developed for the use of organisations involved in the CSG industry, primarily in Australia and New Zealand.

The Code of Practice, and its Companion Papers, and any surrounding material, are copyright to APGA and APGA must be identified as the copyright owner. For licence inquiries, please email apga@apga.org.au

Contents

Acknowledgements	3
Disclaimer.....	3
Feedback process	3
Preface	4
Scope.....	5
2. Introduction.....	5
3. Guidelines.....	5
3.1 <i>Selection Criteria</i>	5
3.1.1. Geology / Soil Type / Topography	6
3.1.2. Existing Services	6
3.1.3. Productivity and Efficiency Requirements	6
3.1.4. Land Holder / Environmental Sensitivity	6
3.1.5. Facility Installation	6
3.1.6. Over-Head Clearance	6
3.2 <i>Training</i>	6
4. Ploughing Operations	7
4.1. <i>Multiple Pipe Installation</i>	7
5. Installation Process.....	8
5.1 <i>Ground Assessment / Pre-Treatment</i>	8
5.2 <i>Pit Excavation</i>	8
5.3 <i>Ploughing of Polyethylene Pipe</i>	8
5.3.1 Pre Installation	8
5.3.2 Machine Control / Asbuilding	9
5.3.3 Prior To Ploughing Operations.....	9
5.4 <i>Backfill / Treatment of disturbed soil</i>	10
Summary	11
6. References	11

Acknowledgements

This Companion Paper has been prepared by the Australian Pipelines and Gas Association (APGA) CSG Committee working group. The working group contributed significant time and resources at the working group level in developing and reviewing this companion paper and their support is acknowledged.

Disclaimer

Although due care has been undertaken in the research and collation of this Companion Paper, this Companion Paper is provided on the understanding that the authors and editors are not responsible for any errors or omissions or the results of any actions taken on the basis of information in this document.

Users of this Companion Paper are advised to seek their own independent advice and, where appropriate, to conduct their own assessment of matters contained in the Companion Paper, and to not rely solely on the papers in relation to any matter that may risk loss or damage.

APGA gives no warranty concerning the correctness of accuracy of the information, opinions and recommendations contained in this Companion Paper. Users of this Companion Paper are advised that their reliance on any matter contained in this Companion Paper is at their own risk.

Feedback process

Feedback on this Companion Paper or recommendations for the preparation of other Companion Papers is encouraged.

In the first instance please direct feedback to:

Secretariat
Australian Pipelines and Gas Association PO Box 5416
Kingston ACT 2604
Email: apga@apga.org.au

Preface

Companion Papers have been developed by the Working Group responsible for the *APGA Code of Practice for Upstream PE Gathering Networks – CSG Industry* (the Code) as a means to document technical information, procedures and guidelines for good industry practice in the CSG industry.

Since 2008 the development of the LNG export industry based in Gladstone, Queensland, with its related requirement for a large upstream CSG supply network of pipelines and related facilities presented the impetus for significant improvements in design and best practice approach.

The principal motivation for the initial development of the APGA Code of Practice was safety and standardisation in design and procedures, and to provide guidance to ensure that (ALARP) risk-based requirements were available to the whole CSG industry. Accordingly, the Code is focused solely on this industry and the gathering networks using locally-manufactured PE100 pipeline. The Code is a statutory document within Queensland.

The incorporation of Companion Papers in the Code is intended to provide information and best practice guidelines to the industry, allowing the Code to be limited to mandating essential safety, design, construction and operation philosophies and practices.

These documents form part of the suite of documents together with the Code and are intended to be:

1. Used in the design, construction and operation of Upstream PE Gathering Networks;
2. Provide an authoritative source of important principles and practical guidelines for use by responsible and competent persons or organisations.

These documents should be read in conjunction with the requirements of the Code to ensure sound principles and practices are followed.

These documents do not supersede or take precedence over any of the requirements of the Code.

A key role of the Companion Papers is to provide the flexibility to incorporate endorsed industry practices and emerging technologies expeditiously, as/when necessary.

A related benefit is that the Companion Papers can be referenced by the wider resources industry which uses similar PE gathering networks for gas or water handling, including coal bed methane (CBM) in underground coal mines; mine de-watering; or the emerging biogas industries (agricultural, landfill, etc.).

1. Scope

The scope of this Companion Paper is related to the safe and efficient installation of ploughing construction, and should be considered as supplementary to the Code, 'Ploughing'.

Ploughing has become more common and accepted in industry especially over the last 5 years during the expansion of the CSG industry. This installation method provides numerous construction advantages especially where high production and or sensitive considerations are key drivers.

There is minimal printed information available related specifically to ploughing installation of PE pipelines, and it is expected this companion paper will assist in demonstrating installation efficiency and foster greater acceptance.

2. Introduction

During recent decades, ploughing technology has emerged internationally as one of the preferred installation techniques for cable and pipe installation for a variety of flexible piping types, especially in challenging terrains. Several technologies are either currently available or are emerging. New technologies need to be evaluated on a case by case basis for any potential benefits they may provide the industry.

Ploughing now represents an alternative to conventional trenching methodology for PE pipe, with the following identified advantages:

- Open excavation is reduced by 90% thereby reducing trench fall-in risks to wildlife.
- Lifting and handling after completion of pipe stringing and welding is reduced.
- Construction Right of Way (CROW) widths can be marginally reduced, as there is no requirement for excavated topsoil/ sub-strata to be stockpiled and segregated-delivering a significant advantage in environmentally or agriculturally sensitive areas.
- Minimal soil inversion / topsoil displacement - a principal advantage in cultivated paddocks (e.g. laser-levelled grain and cotton fields).
- Overall, less plant and equipment is utilised per unit length of installed pipe, thus reducing the quantum of the overall driving task.

Potential disadvantages are few, but do include:

- Potential for mechanical damage due to unseen rock.
- Soil cracking with potential to affect overland flow.

3. Guidelines

Ploughing provides a realistic alternative to conventional trenching for most PE 100 pipe sizes utilised in the CSG industry.

The utilisation of this technology can provide safety, environmental and production advantages (especially with straight runs) when used by competent operators with correct procedures and processes.

The following parts of this companion paper serve to provide more details around these points, though any selection or use of this technology must be, properly considered as per any other construction technique, undergo proper identification of all potentially risks / hazards, and require implementation of all necessary control measures to achieve ALARP.

3.1 Selection Criteria

As per any installation technique its applicability is subject to terrain, geotechnical conditions, project size and other factors detailed below should be considered and risk assessed.

The main points for consideration when assessing the suitability of the plough method have been listed and expanded upon in the following sections.

3.1.1. Geology / Soil Type / Topography

An assessment of the ground conditions should be undertaken, utilizing a cost-effective technique that provides regular assessment of field ground conditions, typically completed by test pits or ground radar.

Plough technology can be used efficiently in all ground conditions except in areas where large sections of rock layers exist. In areas where small sections of rock exist these can be pre-treated with dozers or conventional plant. Where rocky ground exists, it is recommended that the potential for mechanical damage be considered, and sample sections of ploughed pipe examined.

3.1.2. Existing Services

The presence of existing services must be understood to allow for consideration of the risks and hazards associated with working in proximity to existing services.

Task specific 'permit to works' need to include the risks associated with these services and nominate appropriate controls. Different asset owners / services will require different separation distances, and these will also vary dependent upon the control measures utilized.

3.1.3. Productivity and Efficiency Requirements

Plough technology, depending on terrain and whether there are straight runs, can potentially offer significant production and associated cost efficiency to projects with daily production rates of over 2,500m for dual 315 pipes with variances for other sizes and combinations.

3.1.4. Land Holder / Environmental Sensitivity

Where projects are required to operate within either environmental or land holder sensitive areas, a reduced right of way width is possible, while still enabling the plough to work safely and efficiently within widths reduced down to 10 – 15m depending upon pipe sizes and configurations.

3.1.5. Facility Installation

Pipeline facilities cannot be completed ahead of the plough installation though where ground conditions permit pre-excavated facility pits or similar can be used dependent upon pipe and facility installation timeframes.

3.1.6. Over-Head Clearance

Dependent upon the overhead clearance available, different plough selections (over cab or conventional) must be considered during the project planning phases.


3.2 Training

Ploughing is a specialised construction methodology and requires skilled operators. APGA has developed a specific competency standard for pipeline engineers on plough-in (PP019 Plough-in – design and construction) for this operation. Pipeline engineers proposing to consider utilising ploughing technology are recommended to undertake this training prior to undertaking ploughing design and engaging with specialist ploughing contractors to undertake field activities.


4. Ploughing Operations

The ploughed installation process is relatively simply with a plough chute (indicated below in red) attached to a plough which is pulled forward by a winch vehicle or truck following the design alignment which is pre-loaded into the machine guidance system.


Note: Below a specific type of plough equipment is shown. It should be noted there are numerous types of successful ploughing equipment in the marketplace.

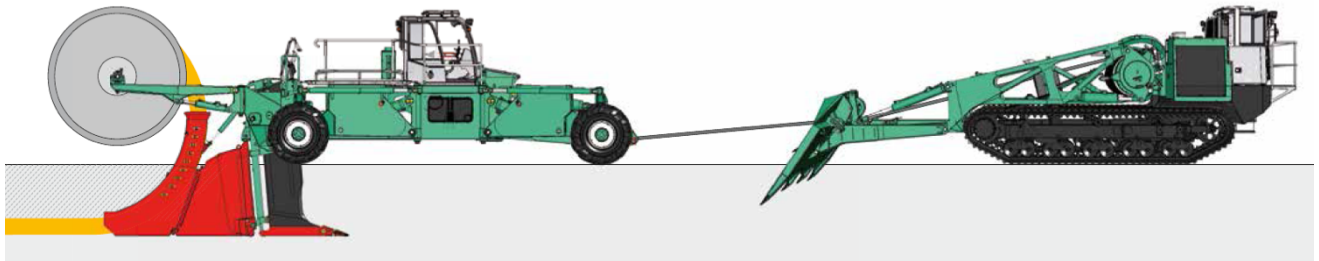

The winch vehicle anchors itself to the ground with its rear stabiliser plate and pulls the plough forward with a constant force (typically of up to 180 tonnes per winch – when double cables are utilised). The depth and alignment of the pipe is controlled by the ripper shoe at the front of the chute which can be adjusted from the driver's cab. This enables precision pipe or cable installation in undulated slope conditions with a horizontal bend radius of up to 4m.

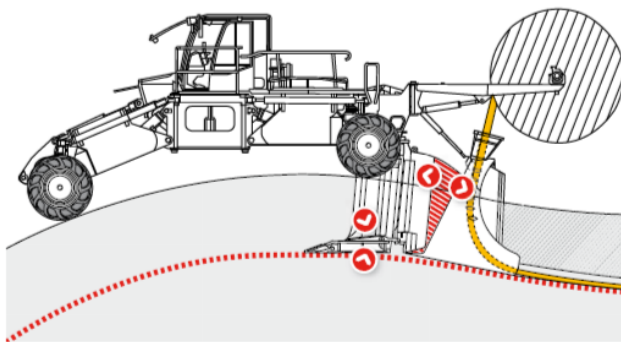

➤ Laying over a hilltop

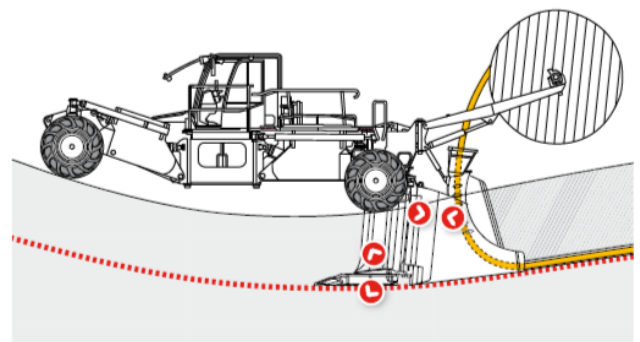

➤ Laying in a dip

Dependent upon the project requirements rehabilitation will be required to be completed to the trench line undertaking compaction of the disturbed trench line.

4.1. Multiple Pipe Installation

The installation of pipe or cable by ploughing can be configured by modification of the chute to allow for multiple cables, pipes, marker tape, tracer wire and or a combination to be installed at the same time to suit individual project requirements.

Modification of approved installation techniques should be designed / reviewed / certified by a Third Party verification and certification process.

Current installation combinations have included:

- Single Pipe Installation (with or without tracer wire / marker tape): Ranging from 110 – 630 mm in Diameter.
- Dual Pipe Installation side by side with nominated separation as determined by project requirements (with or without tracer wire / marker tape); in the following configurations DN 110, 110/160, 315.
- Various Sizes and configurations of cables.

Careful consideration must be made to the arrangement of the pipe and other materials to be installed to ensure a safe installation process that does not damage the integrity of the final product.

5. Installation Process

After the Right of Way has been Cleared and Graded and the pipe has been strung, welded, and destructive testing cut outs completed, the pipe installation crew will commence the installation of the pipeline. Buried services shall be located and identified prior to commencement of any excavation works.

Similar to conventional installation methodologies the installation of polyethylene pipe by ploughing method can be broken into four main stages:

1. Ground Assessment / Pre-treatment.
2. Pit excavation.
3. Ploughing of polyethylene pipe.
4. Backfill / Treatment of disturbed soil.

5.1 Ground Assessment / Pre-Treatment

Prior to undertaking plough installation an assessment of ground conditions using either potholing, ground penetrating radar or geotechnical information should be undertaken.

If this assessment determines that treatment of the ground is required due to the presence of rock or tight ground conditions, machines will be mobilised ahead of the ploughing operation to pre-treat all identified ground. Depending on the ground conditions rock will be removed by either trenching machine or excavator fitted with hydraulic rock hammer.

This ground should be treated to a width sufficient for the plough (typically 950mm) and at a depth greater than the invert of the pipe by a minimum 200mm.

5.2 Pit Excavation

A 20 tonne excavator or greater should be used to excavate the plough start pit and then proceed to excavate all pits necessary for facilities installation (if ground conditions allow) followed by the exit pit.

These pits will be excavated in advance of plough and will have benches, pre-fabricated steps or ramps installed for access and then signage and barricading erected around them in accordance with project and legislative requirements.

Task specific SWMS shall be developed and address controls to prevent inadvertent contact with underground /aboveground services and other identified hazards associated with these tasks.

5.3 Ploughing of Polyethylene Pipe

5.3.1 Pre Installation

Prior to ploughing in a string of pipe a number of pre-installation checks should be undertaken. Some of these have been listed below:

- Pipe inspected for damage.
- All welds located by survey.
- Welds inspected.
- Applicable weld test reports (destructive testing) received confirming conformance.
- All known services have been located.
- Excavation permit is completed.
- Permit to work in place.
- Cut off pipe measured by surveyor.

5.3.2 Machine Control / Asbuilding

For the completeness and accuracy of plough installation 'As Building' records should be completed using the assistance of survey machine guidance and quality verification capabilities.

This information should be correlated with the design survey data to not only ensure the location of the pipe is as per project specification requirement, but also the location and identification of each weld (if required).

5.3.3 Prior To Ploughing Operations


Ploughing in the vicinity of existing pipelines, cables or other services (including buried and above ground services) shall require specific safety considerations. These should be documented and approved prior to commencing plough works.

The alignment and depth of such underground services will be located prior to the commencement of the trenching works and uploaded into the site survey file. The plough will operate to typically within 50m of known services or as specified by the permit. The 50m approach will be applicable in the case of track/road crossings.

An assessment shall determine if either one or two Winch Crawlers will be utilised to pull the Plough. This will depend on the job type (dual or single pipe lay), specification and ground conditions.

All plant used in the ploughing operation will have a Ultra High Frequency (UHF) Radio and the operators will be in contact with each other in order to coordinate the ploughing effectively and safely.

Due to the stored energy retained in the winch cables as part of the ploughing process exclusion zones must form part of any ploughing operation. A typical exclusion zone arrangement for convention ploughing is included below.

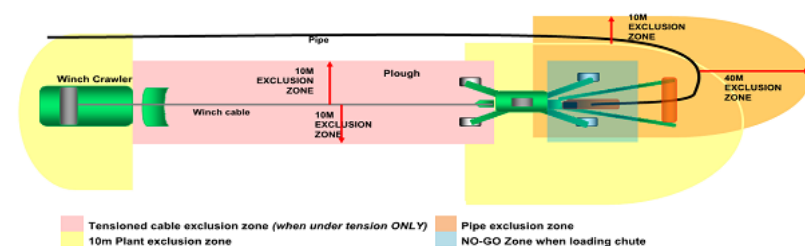

The pipe (following the completion of all pre-installation checks) will be loaded into the pipe chute with the plough positioned within the pre excavated pit and exclusion zones in place. Prior to the commencing of ploughing operations other cables (i.e. tracer wire / fibre optic) should be installed into the plough chute.

The plough should then be connected to the winch crawlers and once the Winch Crawler has tracked forward the specified distance, the blade should be lowered into the ground in order to stabilize the machine. At this point the operators of all machines communicate via UHF to ensure that they are all in position and ready to start ploughing the pipe into the ground. Once positions and machine status has been confirmed the Plough operator shall control the activity.

The Plough operator shall inform Winch Crawler operators via UHF to start winching. The Winch Crawler starts winding in the winch and pulling the plough forward and a ripper and chute displaces the soil, and guides the pipe into the trench. Once the winch is completely wound in, the Winch Crawler lifts the blade, tracks forward, lowers the blade and recommences winching.



This process is then repeated until the nominated plough string is completed and the pipe will be run through into a pre-excavated exit pit or by rising the pipe to the surface for future connections as determined by project requirements.

Note: Any persons working on plant and equipment must be trained in its use and a rescue plan / emergency procedure should be in place.

5.4 Backfill / Treatment of disturbed soil

Once the pipe has been installed using plough methodology further treatment works are required to minimise subsidence of the trench line as much as practical. These works will be different for each project and soil conditions though will typically comprise of a grader removing a certain portion of the material and compacting, prior to the installation of marker tape at the specified depth.

The compaction works can be completed by grader tyre or other compaction equipment completing a sufficient number of passes to achieve the required soil compaction.

Following the successful installation of the pipe additional connection works may be required which are covered in the Code of Practice.

6. Summary

The installation of PE100 pipe with the use of a ploughing system can offer significant safety, environmental, social and cost benefits to any project when suitably trained personnel using the latest technology, are combined with correct planning and preparation practices.

The considerations and work practices outlined within this companion paper should form part of any decision or work process involving this installation technique.

Other commercially confidential documentation e.g. Work Method Statements are available from specialized contractors, fully compatible with CSG OPCO Safe Systems of Work requirements.

7. References

The following Companion Papers should be referenced, as required, to optimize the use of this paper.

CP-02-001 Competency

CP-05-001 Safety in Construction

CP-11-004 Safety in Operations